


# SWITCH'AIR™

## Round & Double Radius domes

NICOMATIC metal domes are used in any type of Man/Machine interface (MMI). The most common application for small diameter 4mm and 5mm Round & Double-Radius domes lies in mobile phone handsets, due to space and thickness savings. Every kind of push-button could integrate a NICOMATIC METAL DOME and/or DOME ARRAYS.

### 2 TYPES

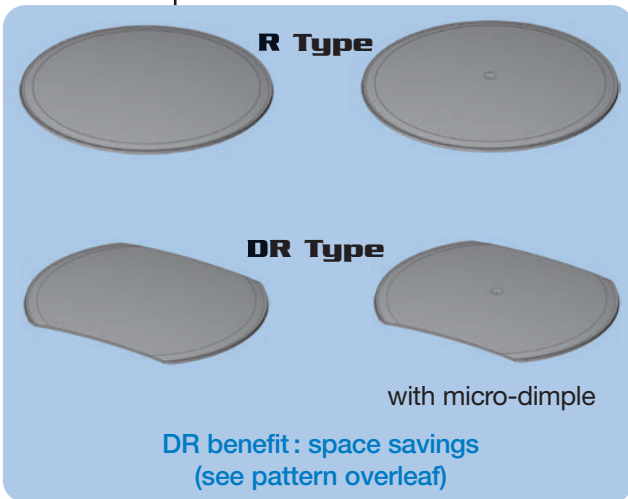

### ADVANTAGES

The NICOMATIC SWITCH'AIR™ Round & DR domes offer :

- Excellent tactile effect even after rigorous tests (click ratio > 50%)
- Very long life expectancy : over 5 million cycles
- Stable forces and homogeneity of forces per batch number
- Control of dimensional and mechanical characteristics
- No burrs, thus eliminating the scratching effect
- Full-cut technology for longer life expectancy
- Successful and reliable automatic placement with NICOMATIC machines
- The standard model is pre-nickel plated to avoid all risk of contamination
- 100% traceability per batch number

### PRODUCTION CAPACITY

NICOMATIC is one of the worldwide largest manufacturers of metal domes:

- Over 100 standard references available
- On-site production and R&D
- Proprietary manufacturing process for EL & DOME ARRAYS

### QUALIFICATION TESTS


- Life expectancy
- Overload test (static load)
- Overstroke
- Sweet spot (position of the actuator shifted from the dome centre)
- O.S.O. test (at a time : overload, sweet spot, overstroke)
- Electrical measurement

### PACKAGING

NICOMATIC SWITCH'AIR™ ROUND & DR domes are either supplied :

- In bulk quantities
- In Pre-Assembled Spacer (PAS) custom-made arrays
- In Electroluminescent (EL) dome arrays

### Mechanical characteristics

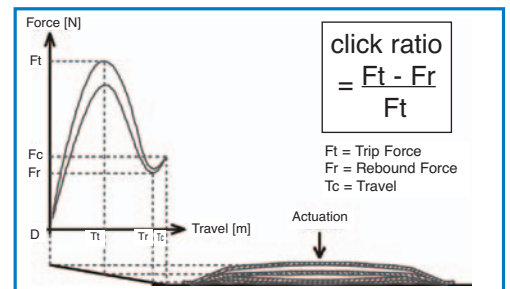


Typical force versus travel curve for a metal dome

**NICOMATIC INTERNATIONAL SUBSIDIARIES :**  
**NICOMATIC NORTH AMERICA**  
 One Ivybrook Blvd, Unit 120  
 Warminster, PA 18974 - USA  
 Tel: (1) 215 444-9580  
 Fax: (1) 215 444-9581  
 E-mail : sales@nicomatic.net

**NICOMATIC SOUTH AMERICA**  
 Rue Ministro de Godoy,  
 478 Cj. 73 Perdizes  
 05015-000 São Paulo - SP - BRAZIL  
 Tel (55) 11 3872-2791 - Cel (55) 11 9685-9671  
 Fax : (55) 11 36 72 -8830  
 E-mail : nicomatic@nicomatic.com.br

**NICOMATIC CHINA**  
 6A XEDA Jimel Industrial Park  
 Xiqing Economic & Development Area  
 Tianjin - CHINA  
 Tel : (86) 22 23888050  
 Fax : (86) 22 23888060  
 E-mail : sales@nicomatic.cn

**NICOMATIC INDIA**  
 Ground Floor Mohan Cooperative  
 Industrial Area Mathura Road,  
 New-Delhi 110044 India  
 Tel : +91 (0) 11 420 919 21  
 Fax : +91 (0) 11 420 919 99  
 E-mail : info@nicomatic.co.in

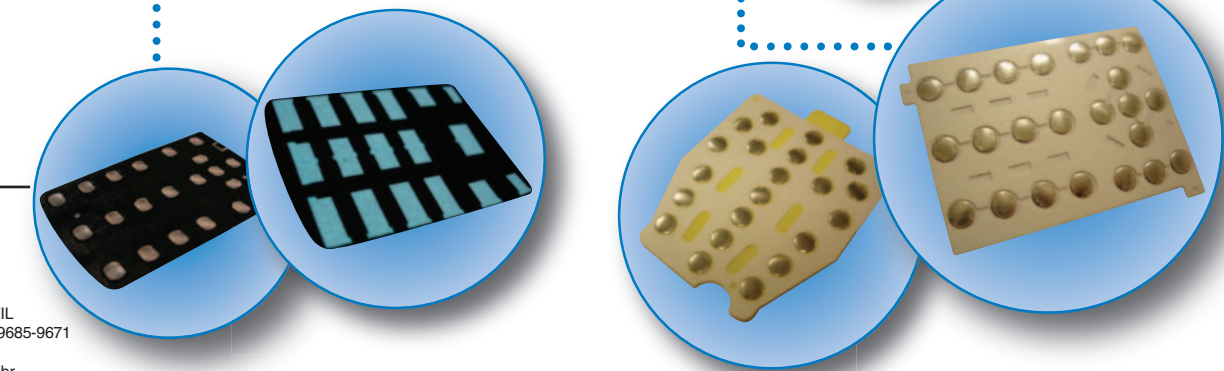


### NICOMATIC HEADQUARTERS

173, rue des Fougères / Z.I. les Bracots / F-74890 Bons-en-Chablais  
 Tél. 33 (0)4 50 36 13 85 - Fax 33 (0)4 50 36 11 33  
 E-mail : nicomatic@nicomatic.fr

For more information on the NICOMATIC distributor network, please visit the web site <http://www.nicomatic.com>



**NICOMATIC FRANCE**  
 is certified ISO 9001



# SWITCH'AIR™

## Round & Double Radius domes

### SERIES R - DR DOMES

#### MATERIAL

- Stainless steel
- RoHS directive compliant
- REACH regulations compliant

#### PLATING



- Nickel plated standard model (-21)
- Optional one side gold plated (-31)

#### ENVIRONMENTAL

- Storage temperature from -55°C to + 125°C
- Operating temperature from -40°C to + 105°C

#### ELECTRICAL

- Rated voltage up to 100 V RMS
- Rated current 5µA to 100 mA
- Contact resistance < 100 mΩ
- Switching capacity 1 W

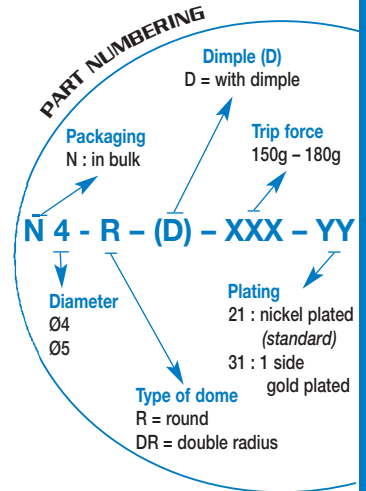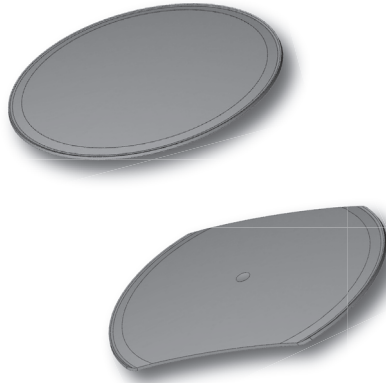

DOME SPECIFICATIONS

#### 4 MM ROUND DOMES

- With and without dimple

DOME REFERENCE XXX	150	180	220
Trip force (g)	150 +30 / -10	180 +/- 25	220 +/- 25
Rebound force (g)	80 +/- 30	90 +/- 30	100 +/- 30
Height (mm)	0.20 +/- 0.03	0.20 +/- 0.03	0.23 +/- 0.03
Total travel (mm) without dimple	0.14 +/- 0.03	0.14 +/- 0.10	0.17 +/- 0.03
Total travel (mm) with dimple	0.135 +/- 0.03	0.135 +/- 0.03	0.165 +/- 0.03
Foot print (mm)	Ø 3,9 +/- 0.05	Ø 3,9 +/- 0.05	Ø 3,9 +/- 0.05
Diameter (mm)	4 +/- 0.05	4 +/- 0.05	4 +/- 0.05
Pattern	A (mm)	4.5	4.5
	B (mm)	3	3
	C (mm)	1.7	1.7
Click ratio (%)	30 - 70	40 - 70	40 - 70

#### 4 MM DOUBLE RADIUS DOMES

- With and without dimple

DOME REFERENCE XXX	150	180	220
Trip force (g)	150 +30 / -10	180 +/- 25	220 +/- 25
Rebound force (g)	80 +/- 30	80 +/- 30	100 +/- 30
Height (mm)	0.23 +/- 0.03	0.23 +/- 0.03	0.23 +/- 0.03
Total travel (mm) without dimple	0.17 +/- 0.03	0.17 +/- 0.03	0.17 +/- 0.03
Total travel (mm) with dimple	0.165 +/- 0.03	0.165 +/- 0.03	0.165 +/- 0.03
Foot print (mm)	Ø 3,9 +/- 0.05	Ø 3,9 +/- 0.05	Ø 3,9 +/- 0.05
Diameter (mm)	4 +/- 0.05	4 +/- 0.05	4 +/- 0.05
Pattern	A (mm)	4.5	4.5
	B (mm)	3	3
	C (mm)	1.7	1.7
	D (mm)	3.5	3.5
	E (mm)	2.5	2.5
H (mm)	3 +/- 0.05	3 +/- 0.05	3 +/- 0.05
Click ratio (%)	30 - 70	40 - 70	40 - 70

#### 5 MM ROUND DOMES

- With and without dimple

DOME REFERENCE XXX	150	180	220
Trip force (g)	150 +30 / -10	180 +/- 25	220 +/- 25
Rebound force (g)	80 +/- 30	90 +/- 30	100 +/- 30
Height (mm)	0.23 +/- 0.03	0.25 +/- 0.03	0.25 +/- 0.03
Total travel (mm) without dimple	0.17 +/- 0.03	0.19 +/- 0.03	0.19 +/- 0.03
Total travel (mm) with dimple	0.16 +/- 0.03	0.18 +/- 0.03	0.18 +/- 0.03
Foot print (mm)	Ø 4,9 +/- 0.05	Ø 4,9 +/- 0.05	Ø 4,9 +/- 0.05
Diameter (mm)	5 +/- 0.05	5 +/- 0.05	5 +/- 0.05
Pattern	A (mm)	5.5	5.5
	B (mm)	4	4
	C (mm)	2.5	2.5
Click ratio (%)	30 - 70	40 - 70	40 - 70

#### 5 MM DOUBLE RADIUS DOMES

- With and without dimple

DOME REFERENCE XXX	150	180	220
Trip force (g)	150 +30 / -10	180 +/- 25	220 +/- 25
Rebound force (g)	80 +/- 30	90 +/- 30	100 +/- 30
Height (mm)	0.23 +/- 0.03	0.25 +/- 0.03	0.25 +/- 0.03
Total travel (mm) without dimple	0.17 +/- 0.03	0.19 +/- 0.03	0.19 +/- 0.03
Total travel (mm) with dimple	0.16 +/- 0.03	0.18 +/- 0.03	0.18 +/- 0.03
Foot print (mm)	Ø 4,9 +/- 0.05	Ø 4,9 +/- 0.05	Ø 4,9 +/- 0.05
Diameter (mm)	5 +/- 0.05	5 +/- 0.05	5 +/- .05
Pattern	A (mm)	5.5	5.5
	B (mm)	4	4
	C (mm)	2.5	2.5
	D (mm)	4.5	4.5
	E (mm)	3.5	3.5
H (mm)	3.8 +/- 0.05	3.8 +/- 0.05	3.8 +/- 0.05
Click ratio (%)	30 - 70	40 - 70	40 - 70

